


Helical Hose  
Construction  
  
Multi Braid Layers

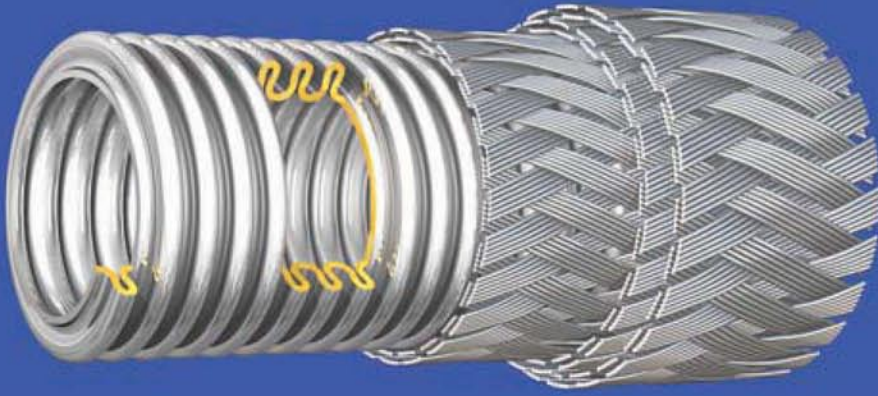

## RF67-XFC

**Construction:**  
Ultra Heavy **T321** hose with multi stainless steel braid layers  
Helical construction  
For ultra high pressure applications

**Sizes:**  
1/4" through 3"

**Maximum Working Pressure:**  
Full vacuum up to 12000 psig  
depending on size

**Temperature:**  
Cryogenic to 1500°F

NOMINAL HOSE I.D.	HOSE TYPE	HOSE O.D.	WEIGHT PER FT.	MIN.LIVE LENGTH FOR VIBRATION	MINIMUM BEND RADIUS		MAXIMUM WORKING PRESSURE	MAXIMUM TEST PRESSURE	NORMAL BURST PRESSURE
					STATIC BEND	DYNAMIC FLEXING			
1/4"	RF67-XFC	0.68	0.62	6.00	2.500	11.500	12000	18000	48000
3/8"	RF67-XFC	0.90	0.97	7.00	3.750	15.000	9000	13500	36000
1/2"	RF67-XFC	1.04	1.34	8.00	4.500	16.500	8500	12750	34000
3/4"	RF67-XFC	1.52	2.56	9.00	6.500	30.500	6800	10200	27200
1"	RF67-XFC	1.93	3.69	10.00	9.000	35.000	6250	9375	25000
1 1/4"	RF67-XFC	2.15	5.08	12.00	10.000	38.000	5500	8250	22000
1 1/2"	RF67-XFC	2.54	6.63	14.00	12.000	41.000	5200	7800	20800
2"	RF67-XFC	3.04	8.07	18.00	15.000	48.000	4350	6525	17400
3"	RF67-XFC	3.50	14.81	24.00	25.000	65.000	3000	4500	12000