


Oil Hose- Heavy Duty

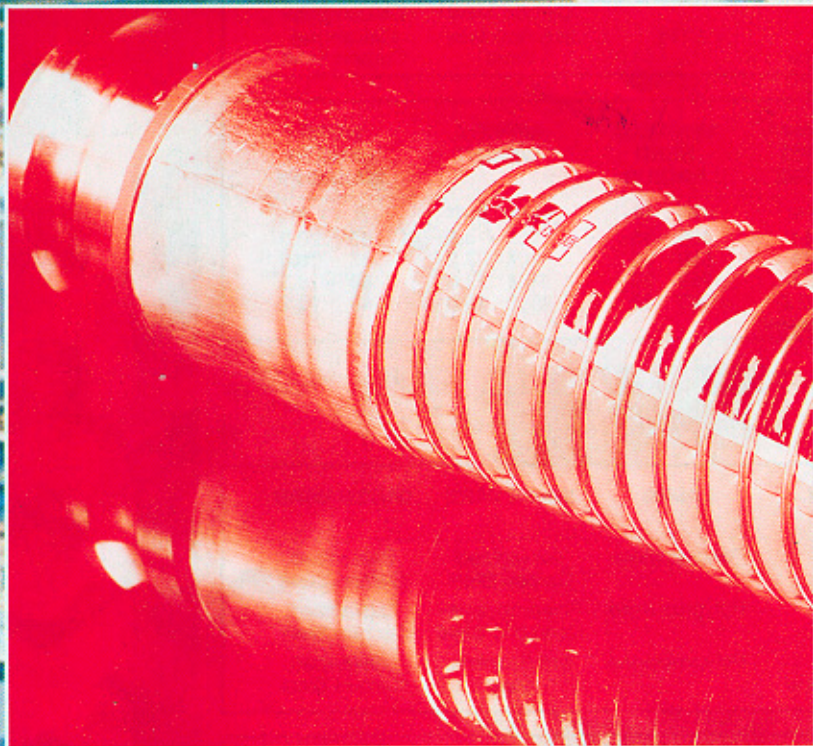

Rackmaster Bottom Loading

TYPE 1061

BLACK COVER – A specially designed hose for bottom loading having flame-resistant cloth under outer cover, galvanized, internal wire, and a heavy-gauge galvanized carbon steel external wire. (Maximum hose length 20m/65ft).

NOMINAL INTERNAL DIAMETER

mm	100
Inches	4

NOMINAL WORKING PRESSURE

PSI	200
bars	14

APPROX. WEIGHT

kg/m	4.1
lb/ft	2.7

BEND RADIUS

mm	250
Inches	10

DUTIES

Willcox heavy duty oil hoses are designed for conveying leaded and unleaded gasoline, diesel, heavy fuel oil, lubricating oils, and other petroleum products.

TEMPERATURE RANGE

-20°F to +180°F.
-30°C to +80°C.

CONSTRUCTION

These hoses are manufactured from polypropylene fabric,

film, and tubes. In addition the hoses have a weatherproof, abrasion-resistant outer cover, reinforced with internal and external spiral wires of galvanized carbon steel.

STANDARD

Types 1091, 1321 and 1061 all conform to BS 5842 1980.

LENGTH

Maximum length 20 metres/65ft.

COUPLINGS

Reusable couplings are available in carbon steel, stainless steel, bronze, and aluminum.

The Willcox spiral hose fitting system is designed to give electrical continuity end to end, a leakproof seal, and secure fitting retention.